


To: EPSON 愛用者

From: EPSON 客服中心

主題: LQ-300+印表機內定值設定執行步驟:

Step 1: 關閉印表機電源, 拔掉印表機和電腦之間的連接線

Step 2: 放入連續報表紙(或依序放入六張 A4 大小的單張紙)於牽引器上, 並確認紙張調整桿是位於連續報表紙位置, 按住面版上的「Tear Off(Font)」鍵不放同時開啓印表機電源

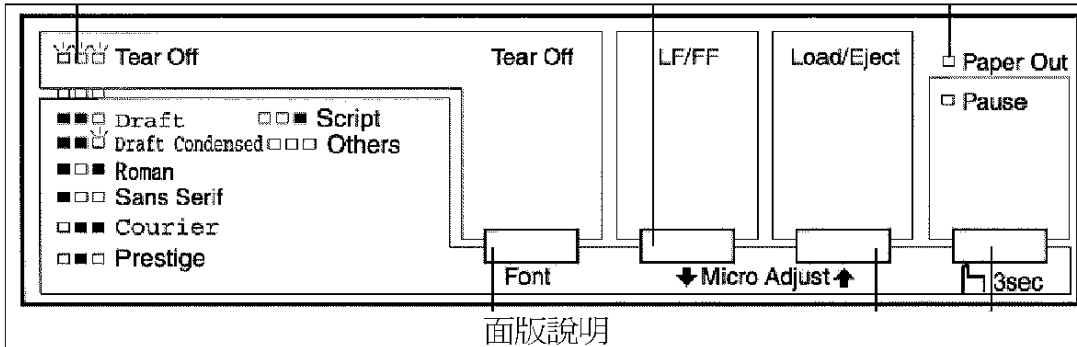

Step 3: 此時, 印表機即進入內定值設定模式, 第一張(圖一)會先列印指示內定值設定模式所需之訊息語言

W0290C

Font LEDs
Voyants Font
Font LEDs
Font LEDs
Indicadores Font
Indicadores Font

■ ■ □	English
■ □ ■	Français
■ □ □	Deutsch
□ ■ ■	Italiano
□ ■ □	Español
□ □ ■	Português

□ : LED on / Voyant On / LED an / Spia acceso / Indicador On / Indicador aceso
■ : LED off / Voyant Non / LED aus / Spia spenta / Indicador Off / Indicador apagado
□ : LED blink / Voyant clignote / LED blinkt / Spia lampeggiante / Indicador Intermitente / Indicador Intermitente
□ : LED 2-blink / Voyant 2-clignote / LED 2-blinkt / Spia 2-lampeggiante / Indicador 2-Intermitente / Indicador 2-Intermitente

- Press the LF/FF button to move through the languages listed in the table; then press the Tear Off button to select the language.

- Appuyez sur le bouton LF/FF afin de choisir la langue à partir du tableau, et validez en appuyant sur le bouton Tear Off.

- Zur Auswahl einer Sprache aus der Tabelle drücken Sie die Taste LF/FF. Bestätigen Sie Ihre Auswahl durch Drücken der Taste Tear Off.

- Premete il tasto LF/FF per scegliere una delle lingue disponibili nella tabella. Premete quindi il tasto Tear Off per confermare la vostra scelta.

- Pulse LF/FF para seleccionar el idioma de la tabla y establézcalo pulsando Tear Off.

- Pressione a tecla LF/FF para percorrer as línguas indicadas na tabela; em seguida, pressione a tecla Tear Off para seleccionar a língua.

圖(一)

Step 4:執行「LF/FF」鍵依照指示燈號選定所要的訊息語言，選定語言後，按「Tear Off(Font)」鍵繼續，印表機會印出目前設定狀態表如圖(二)；(原出廠值是為 English 模式，不需更改請直接按「Tear Off(Font)」鍵即可)

Current Settings		
Page length for tractor		17 inch
Skip over Perforation		Off
Auto tear Off		Off
Auto line feed		Off
Print direction		Bi-D
Software		ESC/P 2
0 slash		0
High speed draft		On
I/F mode		Parallel
Auto I/F wait time		30 seconds
Baud rate		19200BPS
Parity		None
Data length		8 bit
Parallel I/F bidirectional mode		On
Packet mode		Auto
Character table		PC 437
International character set for Italic table		Italic U.S.A.
Pitch		12 cpi
Font		Roman T(PS)
Auto CR(IBM 2390 Plus)		Off
A.G.M.(IBM 2390 Plus)		Off
Manual feed wait time		1.5 seconds
Buzzer		On
Roll paper		Off
If you want to change any setting, press the Tear Off switch.		
If you want not to change any settings, turn off the printer.		
*上述為印表機目前的設定狀態表		

圖(二)

Step 5:欲進一步更改設定值請按「Tear Off(Font)」鍵，會繼續列印出下列設定值

如附表(二)；若不需更改請直接將印表機電源關閉即可

Step 6:請按「Tear Off(Font)」鍵依照指示燈號選定所要變更的主功能項
如：欲更改 Page length for tractor 主功能項，Font 的三個燈號需為「滅滅亮」

Step 7:確認主功能項的燈號無誤後，請按「LF/FF」鍵依照指示燈號選定所要變更的細功能項
如：欲將 Page length for tractor 的報表紙頁長改為 5.5 inch，Font 的三個燈號需為「亮滅滅」

Step 8:若還要變更其它的主功能項及其細功能項請重覆 Step6 及 Step7

Step 9:完成所欲變更的設定後，請直接關閉印表機的電源即自動儲存所變更的設定值

★ 附表(一) 詳細功能請參考中文使用手冊 2-3 章節

Menu	**主功能項**
Page length for tractor	連續報表紙頁長設定
Skip over Perforation	一英吋針線孔跳躍
Auto tear Off	自動定頁撕紙
Auto line feed	自動換行
Print direction	列印方向
Software	軟體
O slash	斜線零
High Speed draft	高速草稿列印
I/F mode	傳輸界面模式
Auto I/F wait time	界面自動切換時限
Baud rate	傳輸速率
Parity	同位元檢查
Data length	資料長度
Parallel I/F bi-directional mode	雙向並行界面傳輸模式
Packet mode	封包模式
Character table	字元表
International character set for Italic table	斜體字元表的國際字元集
Pitch	字間距
Font	字型
Auto CR(IBM 2390 Plus)	自動歸位
A.G.M.(IBM 2390 Plus)	繪圖列印模式
Manual feed wait time	手動進紙的等待時間
Buzzer	警告嗶聲

★ 附表(二)

(1) Select menu by pressing the Tear Off switch.
Following LEDs show menu selected at that time.

Font LEDs			
			** Menu **
■	■	□	Page length for tractor
■	□	■	Skip over Perforation
■	□	□	Auto tear Off
□	■	■	Auto line feed
□	■	□	Print direction
□	□	■	Software
■	■	☐	0 slash
■	☐	■	High speed draft
■	☐	☐	I/F mode
☐	■	■	Auto I/F wait time
☐	■	☐	Baud rate
☐	☐	■	Parity
□	■	☐	Data length
□	☐	■	Parallel I/F bidirectional mode
□	☐	☐	Packet mode
□	□	☐	Character table
□	☐	□	International character set for Italic table
☐	■	□	Pitch
☐	□	■	Font
☐	□	□	Auto CR(IBM 2390 Plus)
☐	☐	□	A.G.M.(IBM 2390 Plus)
☐	□	☐	Manual feed wait time
■	■	☐	Buzzer
■	☐	■	Roll paper

(2) Change setting value pressing the LF/FF switch.
Following LEDs show setting value selected at that time.

(3) Repeat (1) and (2) according to following guide printing.

Font LEDs				Font LEDs			
Page length for tractor							
■	■	□	3 inch	■	☐	■	8.5 inch
■	□	■	3.5 inch	■	☐	☐	11 inch
■	□	□	4 inch	☐	■	■	70/6 inch
□	■	■	5.5 inch	☐	■	☐	12 inch
□	■	□	6 inch	☐	☐	■	14 inch
□	□	■	7 inch	□	■	☐	17 inch
■	■	☐	8 inch	□	☐	■	Others
Skip over Perforation							
■	■	□	Off				
■	□	■	On				
Auto tear Off							
■	■	□	Off				
■	□	■	On				

Font LEDs 	Font LEDs
Auto line feed	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> Off <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> On	
Print direction	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> Bi-D <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> Uni-D <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> Auto	
Software	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> ESC/P 2 <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> IBM 2390 Plus	
0 slash	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 0 <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> 0	
High speed draft	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> Off <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> On	
I/F mode	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> Auto <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> Parallel <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> Serial	
Auto I/F wait time	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 10 seconds <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> 30 seconds	
Baud rate	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 19200BPS <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> 9600BPS <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 4800BPS <input type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> 2400BPS	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 1200BPS <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> 600BPS <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 300BPS
Parity	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> None <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> Even <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> Odd <input type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> Ignore	
Data length	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> 8 bit <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> 7 bit	
Parallel I/F bidirectional mode	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> Off <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> On	
Packet mode	
<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> Auto <input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> Off	

Font LEDs

| | |

****Character table****

- Italic
- PC 437
- PC 850
- PC 860
- PC 863
- PC 865
- PC 861

Font LEDs

| | |

- BRASCHII
- Abicomp
- Roman 8
- ISO Latin 1
- PC 858
- ISO 8859-15

****International character set for Italic table****

- Italic U.S.A.
- Italic France
- Italic Germany
- Italic U.K.
- Italic Denmark 1
- Italic Sweden
- Italic Italy
- Italic Spain 1

****Pitch****

- 10 cpi
- 12 cpi
- 15 cpi
- 17 cpi
- 20 cpi
- Proportional

****Font****

- OCR-B
- Orator
- Orator-S
- Script C
- Roman T(PS)
- Sans serif H(PS)

****Auto CR(IBM 2390 Plus)****

- Off
- On

****A.G.M.(IBM 2390 Plus)****

- Off
- On

****Manual feed wait time****

- 1 seconds
- 1.5 seconds
- 2 seconds
- 3 seconds
- Others

****Buzzer****

- Off
- On

****Roll paper****

- Off
- On

(4) Turn off the printer to finish setting.