


TO：EPSON 愛用者

FROM：EPSON 客服中心

主題敘述：雷射複合機 ACULASER CX17NF 驅動安裝到一半，一直顯示檢查磁碟空間，無法安裝驅動程式的訊息。

* 通常是系統暫存區問題，可改用手動安裝驅動。

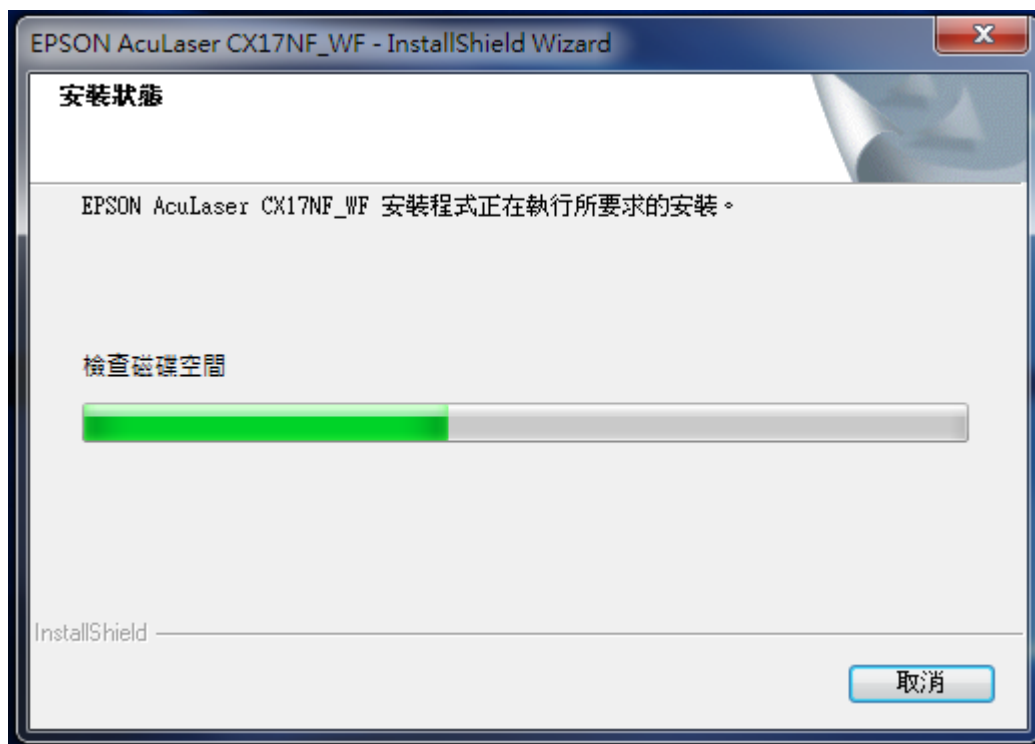

步驟 1、先從官網下載驅動。
網

址：<http://www.epson.com.tw/CustomerAndDownload/SearchResult/909d1467-6168-4287-a027-609f070d2bc8>

客服與下載 查詢結果

查詢標種：Epson AcuLaser CX17NF



EPSON針對此機種型號，為您提供下列維修服務：

- 全省維修據點
- 24小時線上免費叫修及維修進度查詢
- 24小時傳真報修

下載中心

【小提醒】請確認是否偵測到您的作業環境？若否，請重新選擇

Windows 7 32-bit

驅動程式

檔案名稱	語言	版本	磁片數	檔案大小	更新日期	下載	詳細說明
列印驅動程式 (Print Driver)	多語版	1.7	全一片	183654k	2015/9/3	Download	
掃描驅動程式 (Scanner Driver)	雙語版	1.1	全一片	4505k	2013/7/3	Download	

* 安裝說明請參考技術文件

技術文件

檔案名稱	語言	版本	磁片數	檔案大小	更新日期	下載	詳細說明
------	----	----	-----	------	------	----	------

步驟 2、按「接受」鍵，按「儲存」選項，將檔案儲存到桌面。




The image shows the Epson website's download page for the printer driver. It features the Epson logo, a photo of two women, and a 'Download' button. Below is a table with technical specifications for the driver. At the bottom, there is a copyright notice and a 'Download' button.

產品名稱	AcuLaser CX17NF, AcuLaser CX17WF
語言	All language
作業系統	Windows XP, Windows x64, Windows Vista, Windows Vista x64, Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows 8.1, Windows 8.1 x64, Windows 10, Windows 10 x64
國家 / 區域	Taiwan
版本	Ver. 1.7(04-2013)
檔案名稱	ALCX17NFWF_WIN_DRV_VOL17.exe
檔案大小	179.35 MB

請注意 [Epson 軟體授權合約](#) 中有以下載的條款。
按下 **接受** 鍵表示您可同意遵守軟體授權合約中的條款。


Copyright (C) SEIKO EPSON CORPORATION 2007-2013. All rights reserved.





The image shows a Windows file download dialog box. The text asks if the user wants to execute or save the file 'ALCX17NFWF_WIN_DRV_VOL17.exe (179 MB)' from 'download3.ebz.epson.net'. There are three buttons: '執行(R)', '儲存(S)', and '取消(C)'. The '儲存(S)' button is highlighted with a red box.

您要執行或儲存來自 download3.ebz.epson.net 的 ALCX17NFWF_WIN_DRV_VOL17.exe (179 MB) 嗎?

步驟 3、點選桌面上「ALCX17NFWF_WIN_DRV_VOL17.exe」檔案，開啟壓縮檔。

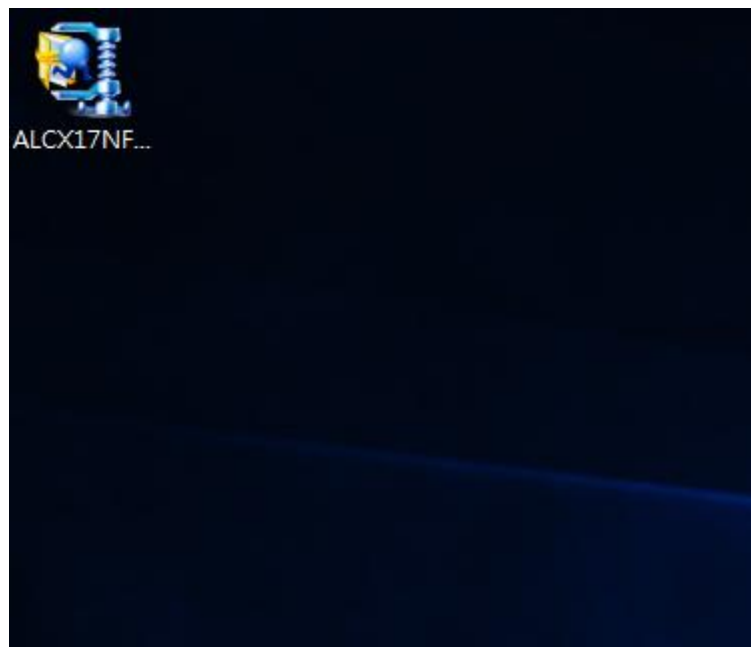


步驟 4、點選「Browse」鍵，指定路徑到桌面，點選「Unzip」鍵，解壓縮。

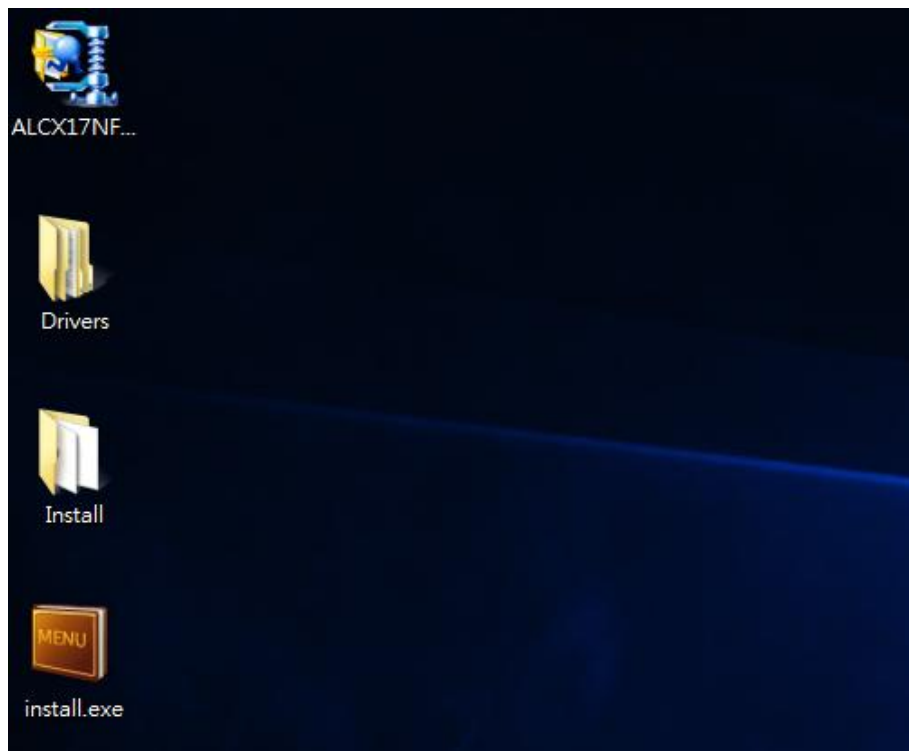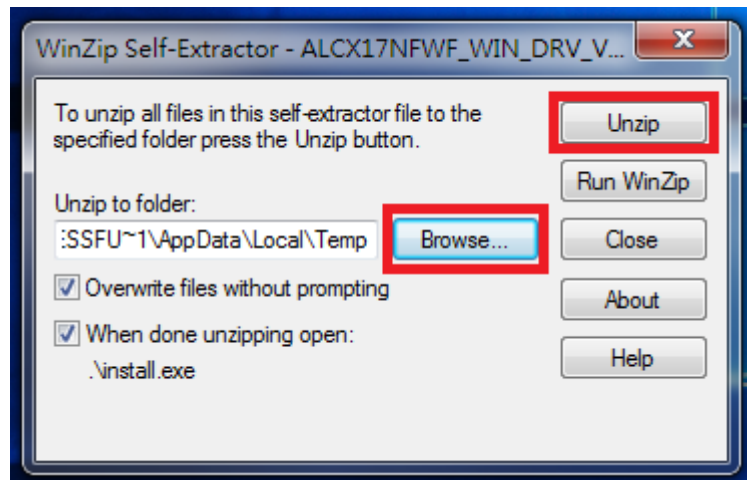


解壓縮完成出現 install.exe 檔案與 Install 及 Drivers 兩個資料夾


步驟 5、選擇左下角開始功能表，點選「裝置和印表機」。

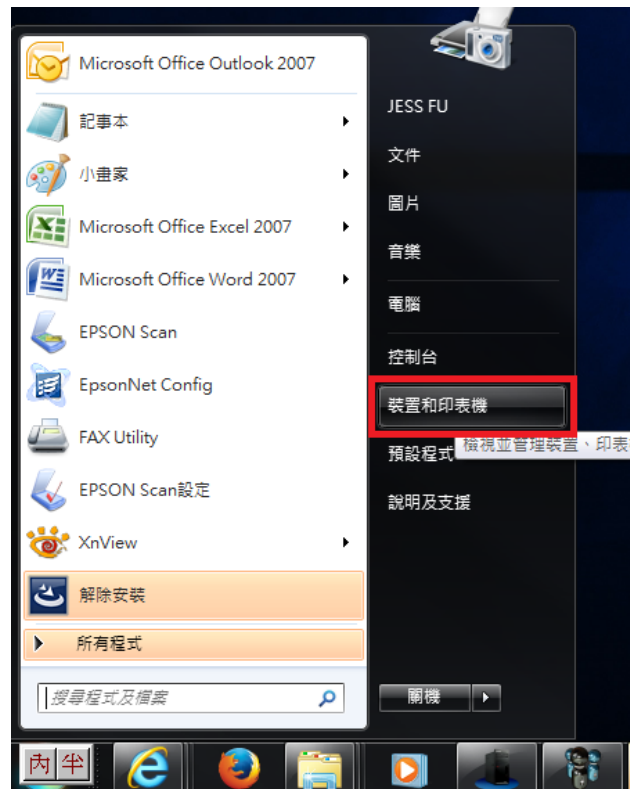


步驟 6、選擇上方的「新增印表機」。

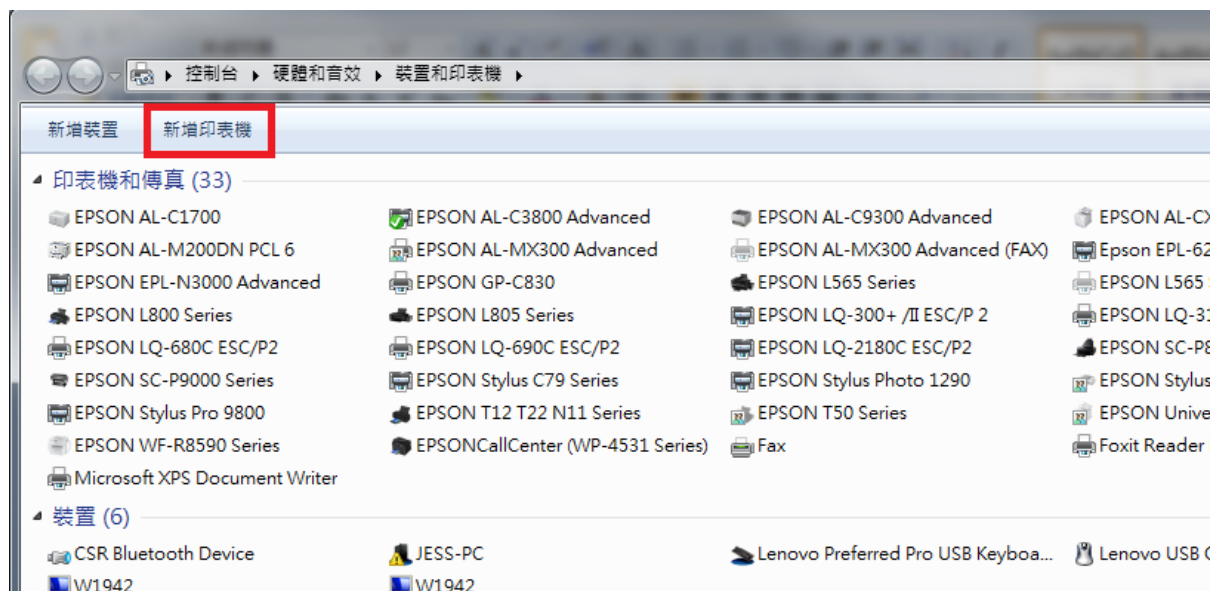


步驟 7、選擇上方的「新增本機印表機(L)」。

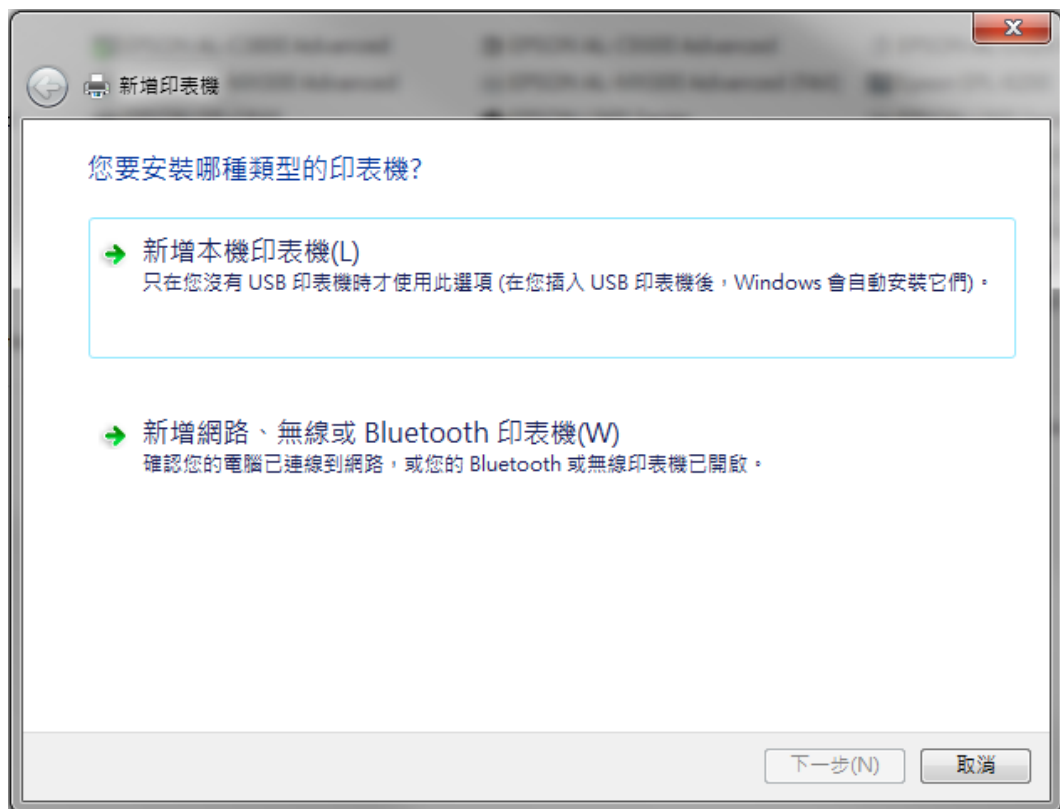


步驟 8、選擇「連接埠」。然後按「下一步」，若使用網路 IP 位址，可按建立新的連接埠設定，若使用 USB 連線，待驅動程式安裝完成後，印表機 USB 重新插拔，即可抓到印表機。

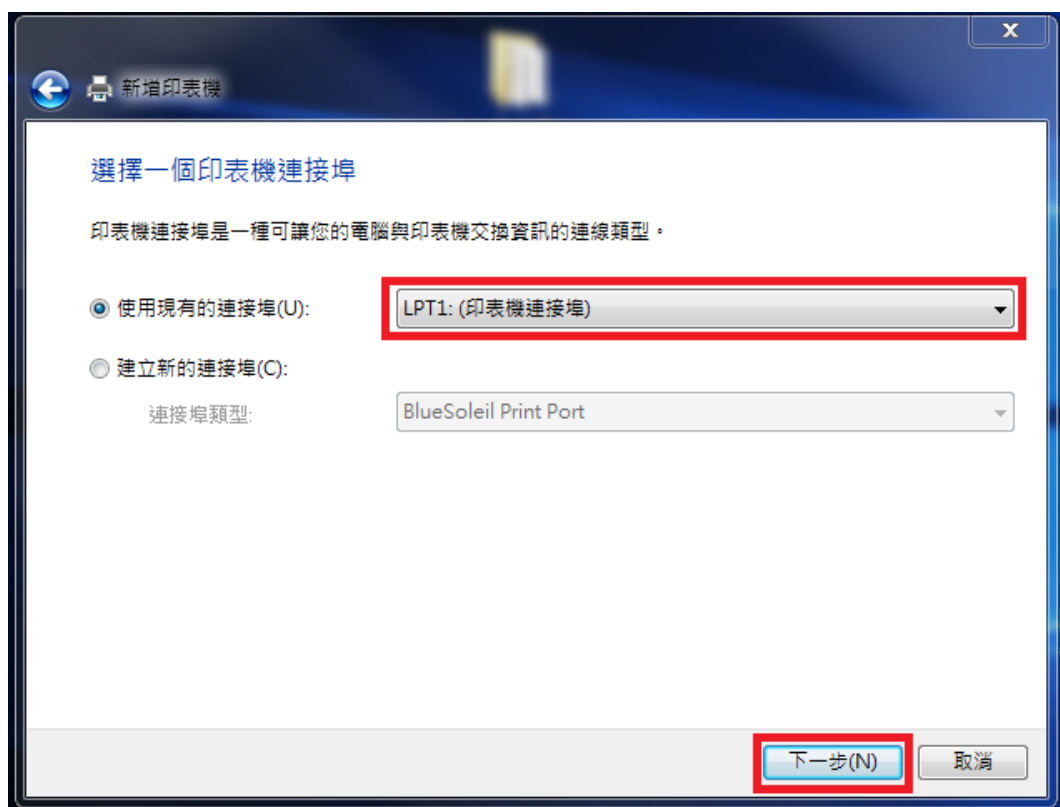



步驟 9、選擇「從磁片安裝(H)」。

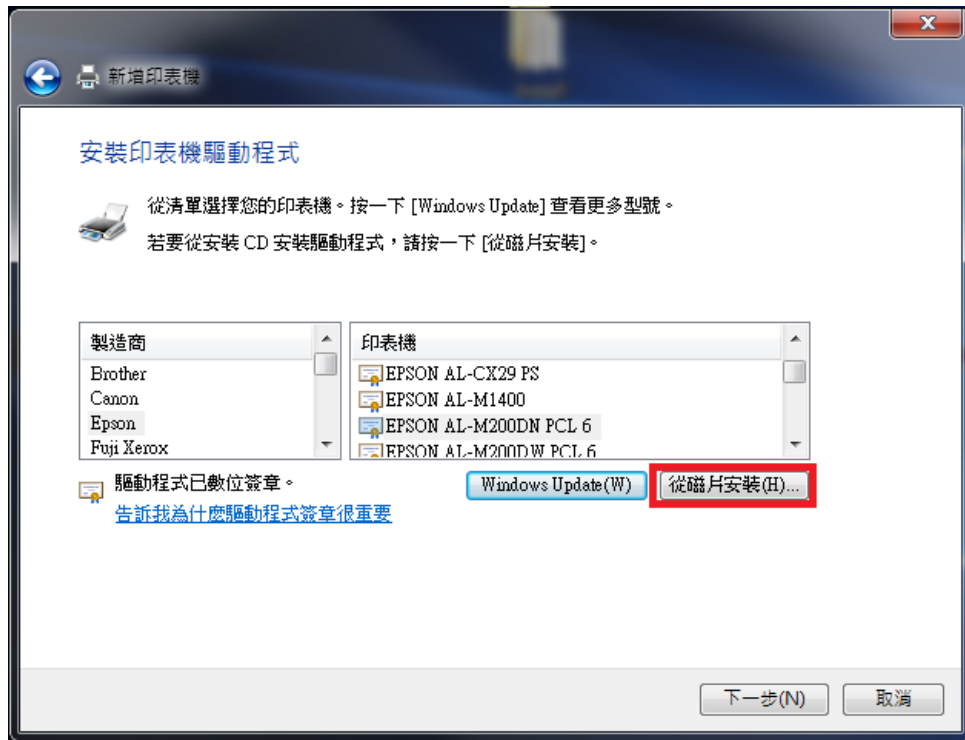


步驟 10、32 位元選擇路徑指到桌面的\Drivers\HB\Win_87VistaXPx32\TraditionalChinese\
sehk3a.inf
若是 64 位元選擇路徑指到桌面的\Drivers\HB\Win_87VistaXPx64
\TraditionalChinese\sehk3a.inf

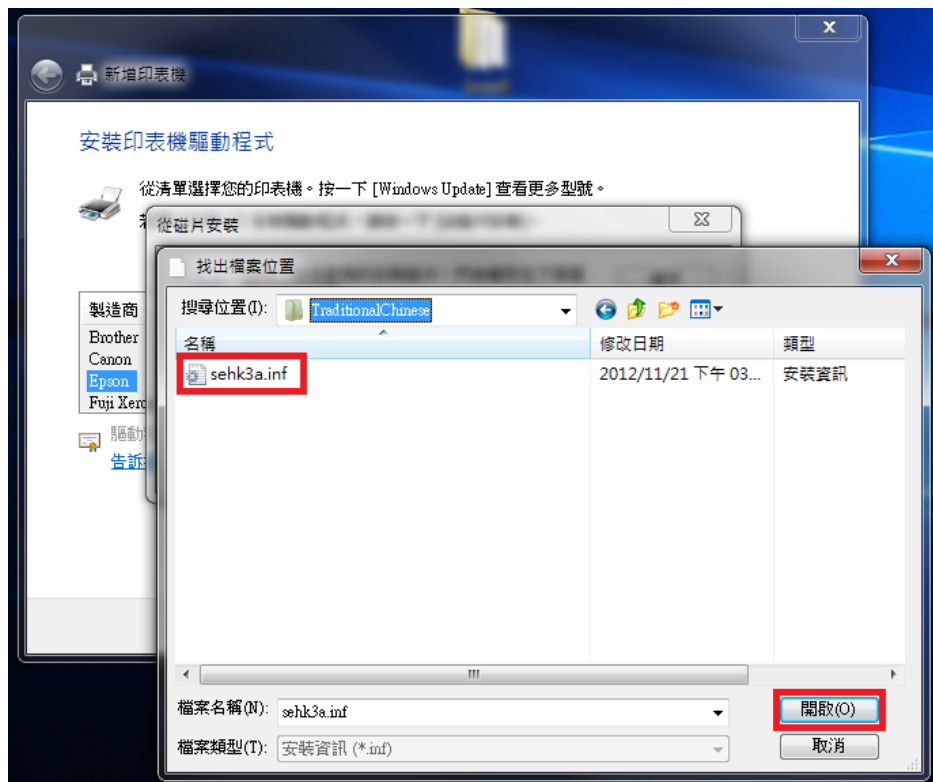

步驟 11、按「確定」後，出現 EPSON AL-CX17NF 及 EPSON AL-CX17WF 選項。
點選 EPSON AL-CX17NF 按『下一步』。

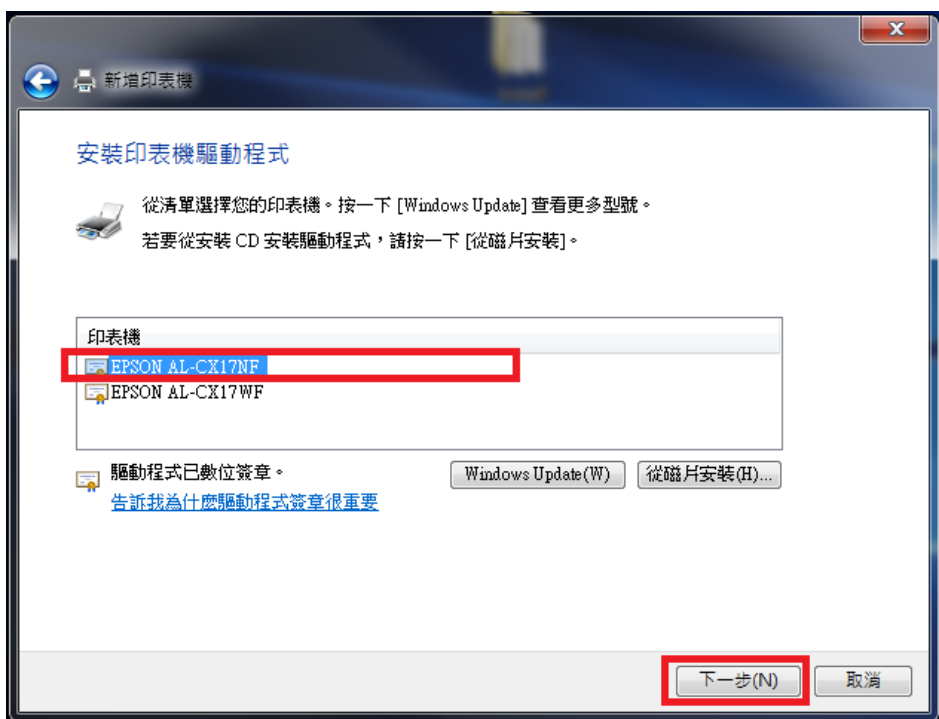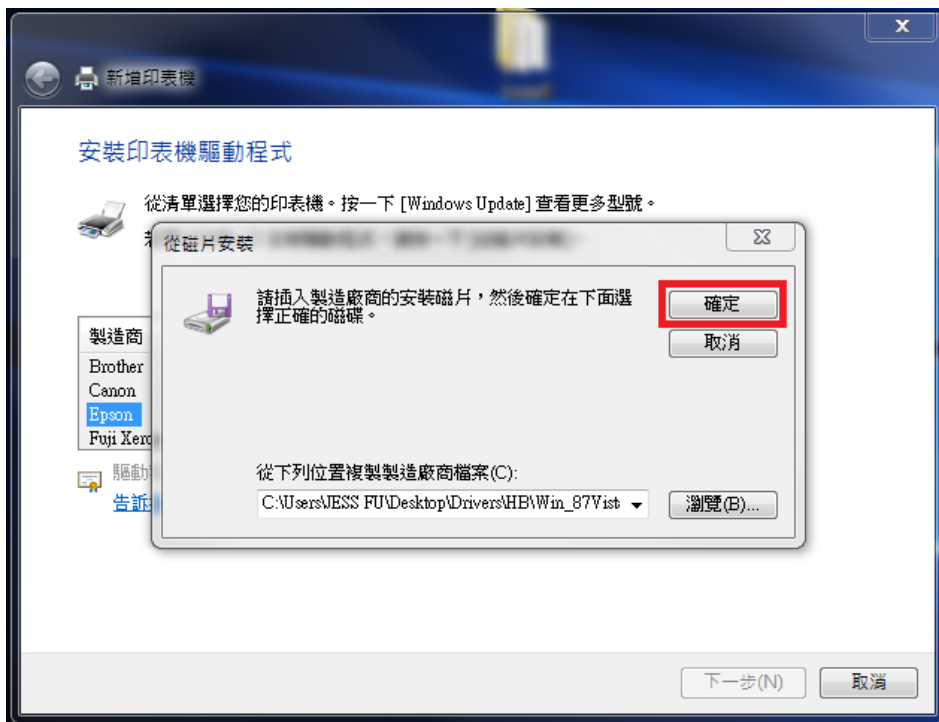

步驟 12、確認印表機名稱按『下一步』。

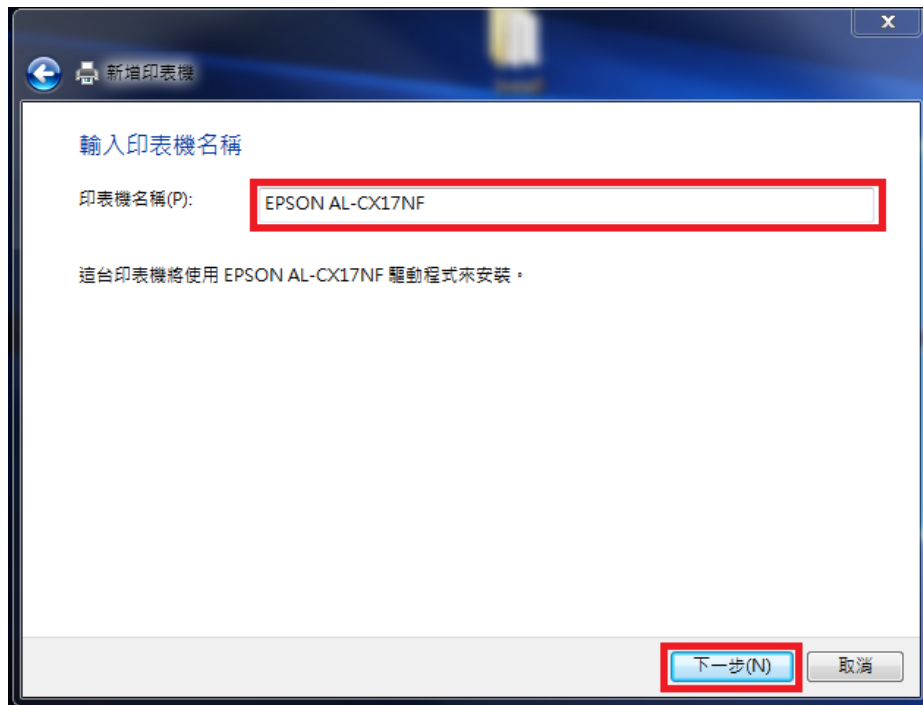

步驟 13、印表機不共用，按『下一步』。



步驟 14、按『完成』即完成驅動安裝。

