


TO：EPSON 愛用者


FROM：EPSON 客服中心

主題敘述：原廠連續供墨系統 EPSON L1455 如何透過 WEB 選單建立傳真電話簿


步驟 1: 請開啟瀏覽器(以 Internet Explorer 為例)，在網址列輸入印表機 IP 位址。

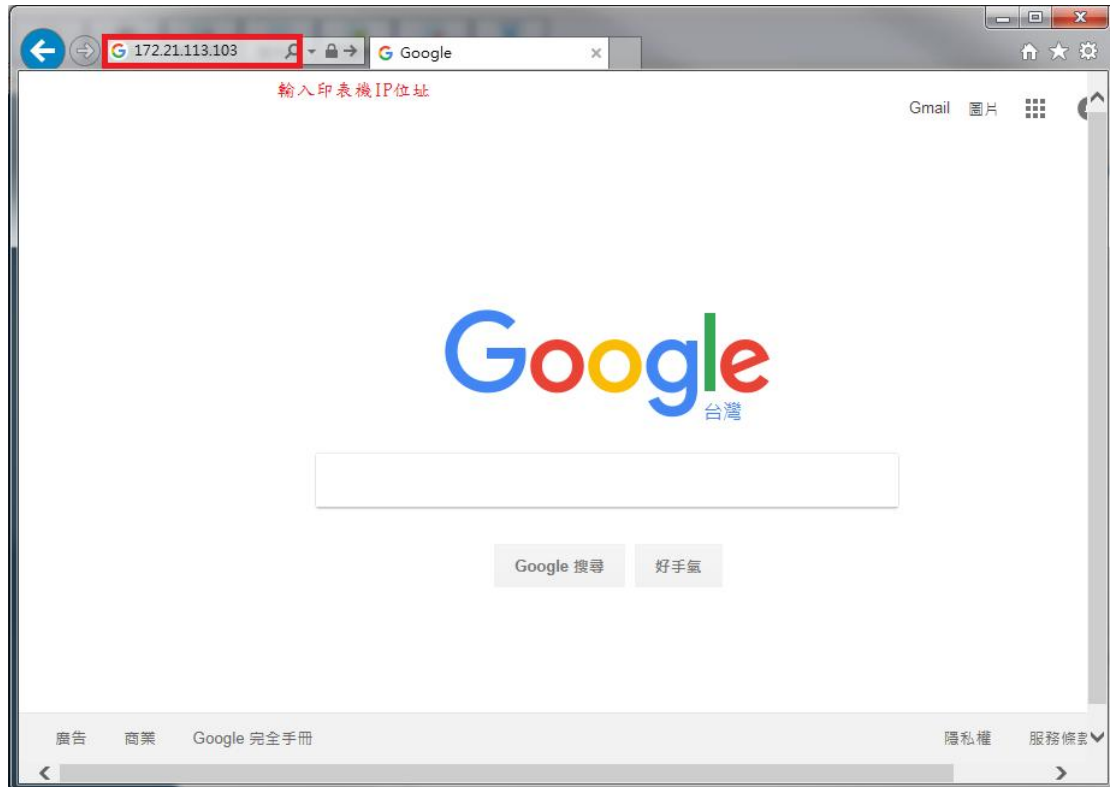


步驟 2: 在 L1455 WEB 選單中，點選「Status」選項下的子選項「Contacts」。

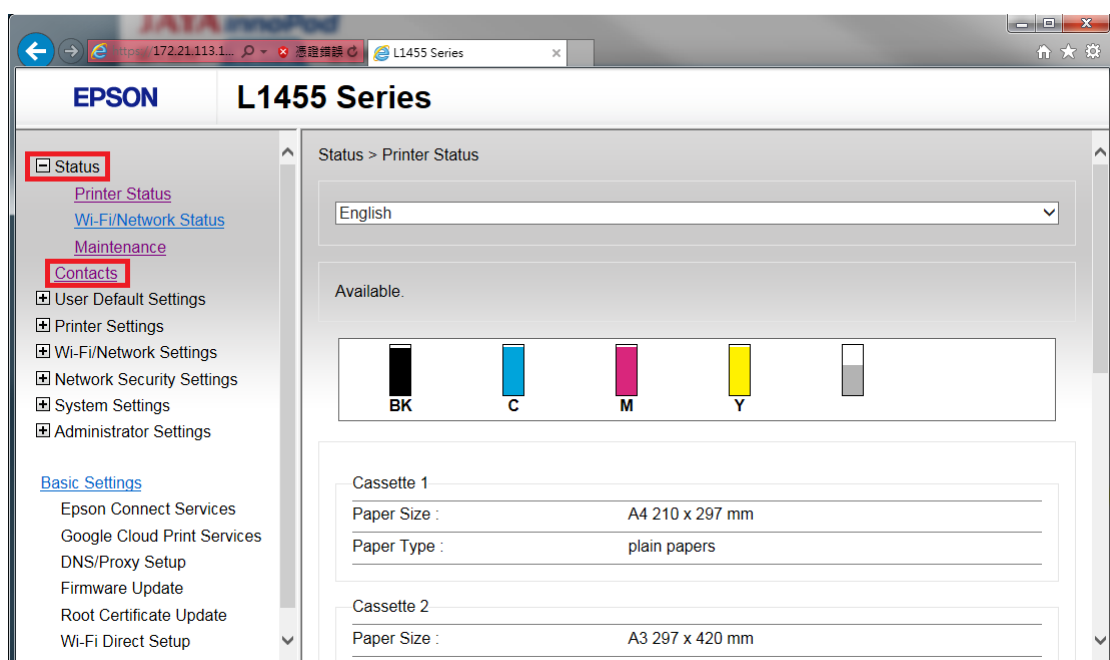

步驟 3:在電話簿選單中，點選「Add」新增電畫簿資訊。

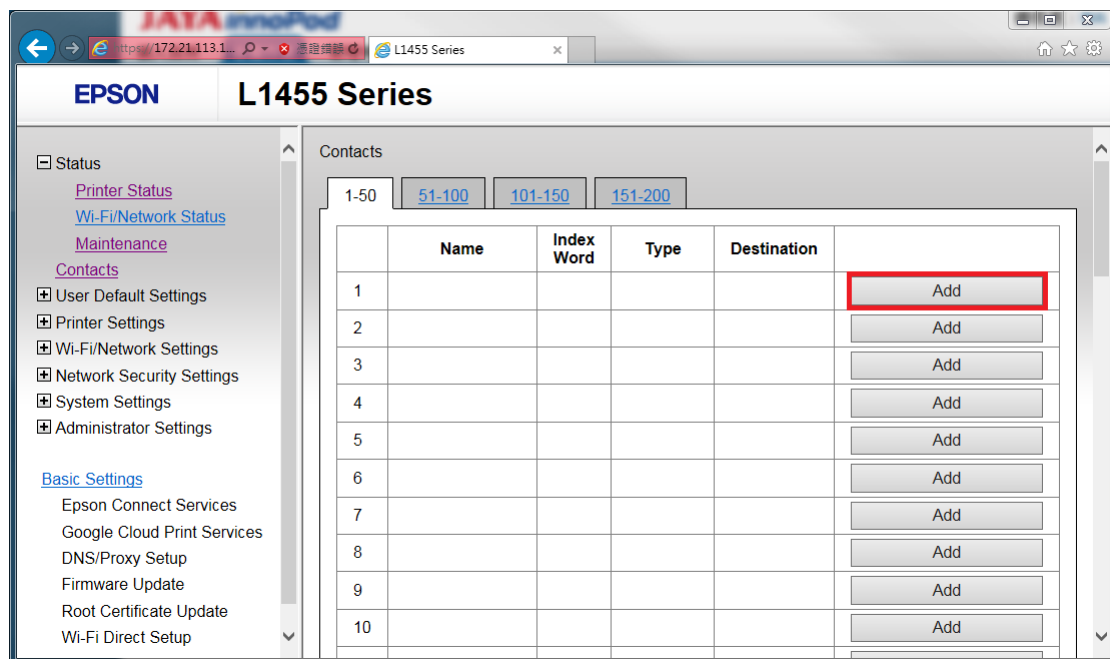

步驟 4:Type 確認為 FAX，再點選「Next」下一步。

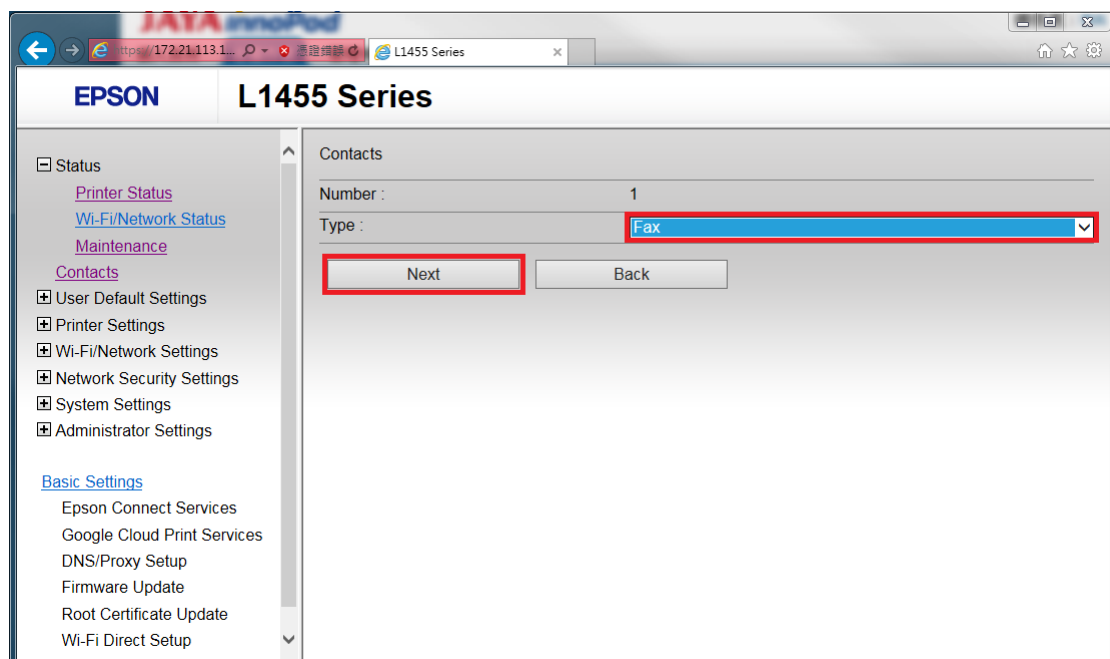

步驟 5:在選單中，輸入「Name 名稱:」、「Index Word:關鍵字」、「Fax Number 傳真號碼」:然後按「Apply 套用」即新增完成。

The screenshot shows the 'Contacts' configuration page for an EPSON L1455 Series printer. On the left is a navigation menu with options like Status, Printer Status, Maintenance, Contacts, and various settings. The main area is titled 'Contacts' and contains input fields for 'Number' (1), 'Type' (Fax), 'Name' (測試), 'Index Word' (test), 'Fax Number' (82278080), and 'Fax Speed' (Follow Communication Setting). The 'Apply' button is highlighted with a red rectangle.

步驟 6:要新增其它傳真電話，請重複步驟 3~步驟 5 動作，共可建立 200 筆電話。

The screenshot shows the 'Contacts' list after the setup is complete. A message 'Setup complete.' is displayed at the top. Below the message are tabs for contact ranges: 1-50, 51-100, 101-150, and 151-200. The first tab (1-50) is selected, showing a table of 10 contacts. The first contact is '測試' (test) with fax number '82278080'. The 'Add' button is highlighted with a red rectangle.

	Name	Index Word	Type	Destination	
1	測試	test	Fax	82278080	Edit
2					Add
3					Add
4					Add
5					Add
6					Add
7					Add
8					Add
9					Add
10					Add